

|  |                 |
|--|-----------------|
| CLASS "B" MOTOR - SLEEVE BEARING MANUFACTURED<br>(Motore classe "B" - Esecuzione a Bronzine) |                 |
| AXIAL CLEARANCE (Gioco Assiale)  | 1,0 - 3,5       |
| SHELL (Fascia)   | CLOSED (Chiusa) |
| END SHIELD - CABLE SIDE (Coperchio lato cavi)  | OPEN (Aperto)   |
| END SHIELD - OPPOSITE CABLE SIDE (Coperchio lato opposto cavi)                               | OPEN (Aperto)   |
| ASSEMBLY SPECIFICATION No.<br>(Normativa per note di montaggio)                              | EL.UN.0009      |
| MECHANICAL SPECIFICATION No.<br>(Normativa per note di controllo meccanico)                  | EL.CM.0002      |
| ELECTRICAL SPECIFICATION No.<br>(Prescrizione per controllo elettrico)                       | M.1362          |

CODE: 4-010-256  
TYPE: 3RGB 6-20-20/ 1

230V ~ 50Hz 0.35A  
18/76 W TH.PROT. INS.CL.B  
850 Rpm 2.5 µF 450 VL

ROTATION ← DATA

|              |        |
|--------------|--------|
| WHITE        | COMMON |
| BLACK        | MAX-1  |
| BLUE         | MID-2  |
| RED          | MIN-3  |
| YELLOW       |        |
| YELLOW       | C      |
| YELLOW/GREEN |        |

CE

STRAIGHT RECEPTACLE  
RECEPTACLE SLEEVE  
(Faston femmina - Coprifaston)

ROLL UP THE CABLE  
WITH A DIAMETER OF ABOUT  
Ø 100 - 120 mm  
(Arrotolare il cavo con un diametro  
di circa Ø 100 - 120 mm)

YELLOW / GREEN  
WHITE  
BLACK  
BLUE  
RED



A

B

C

D

E


A

B

C

D

E

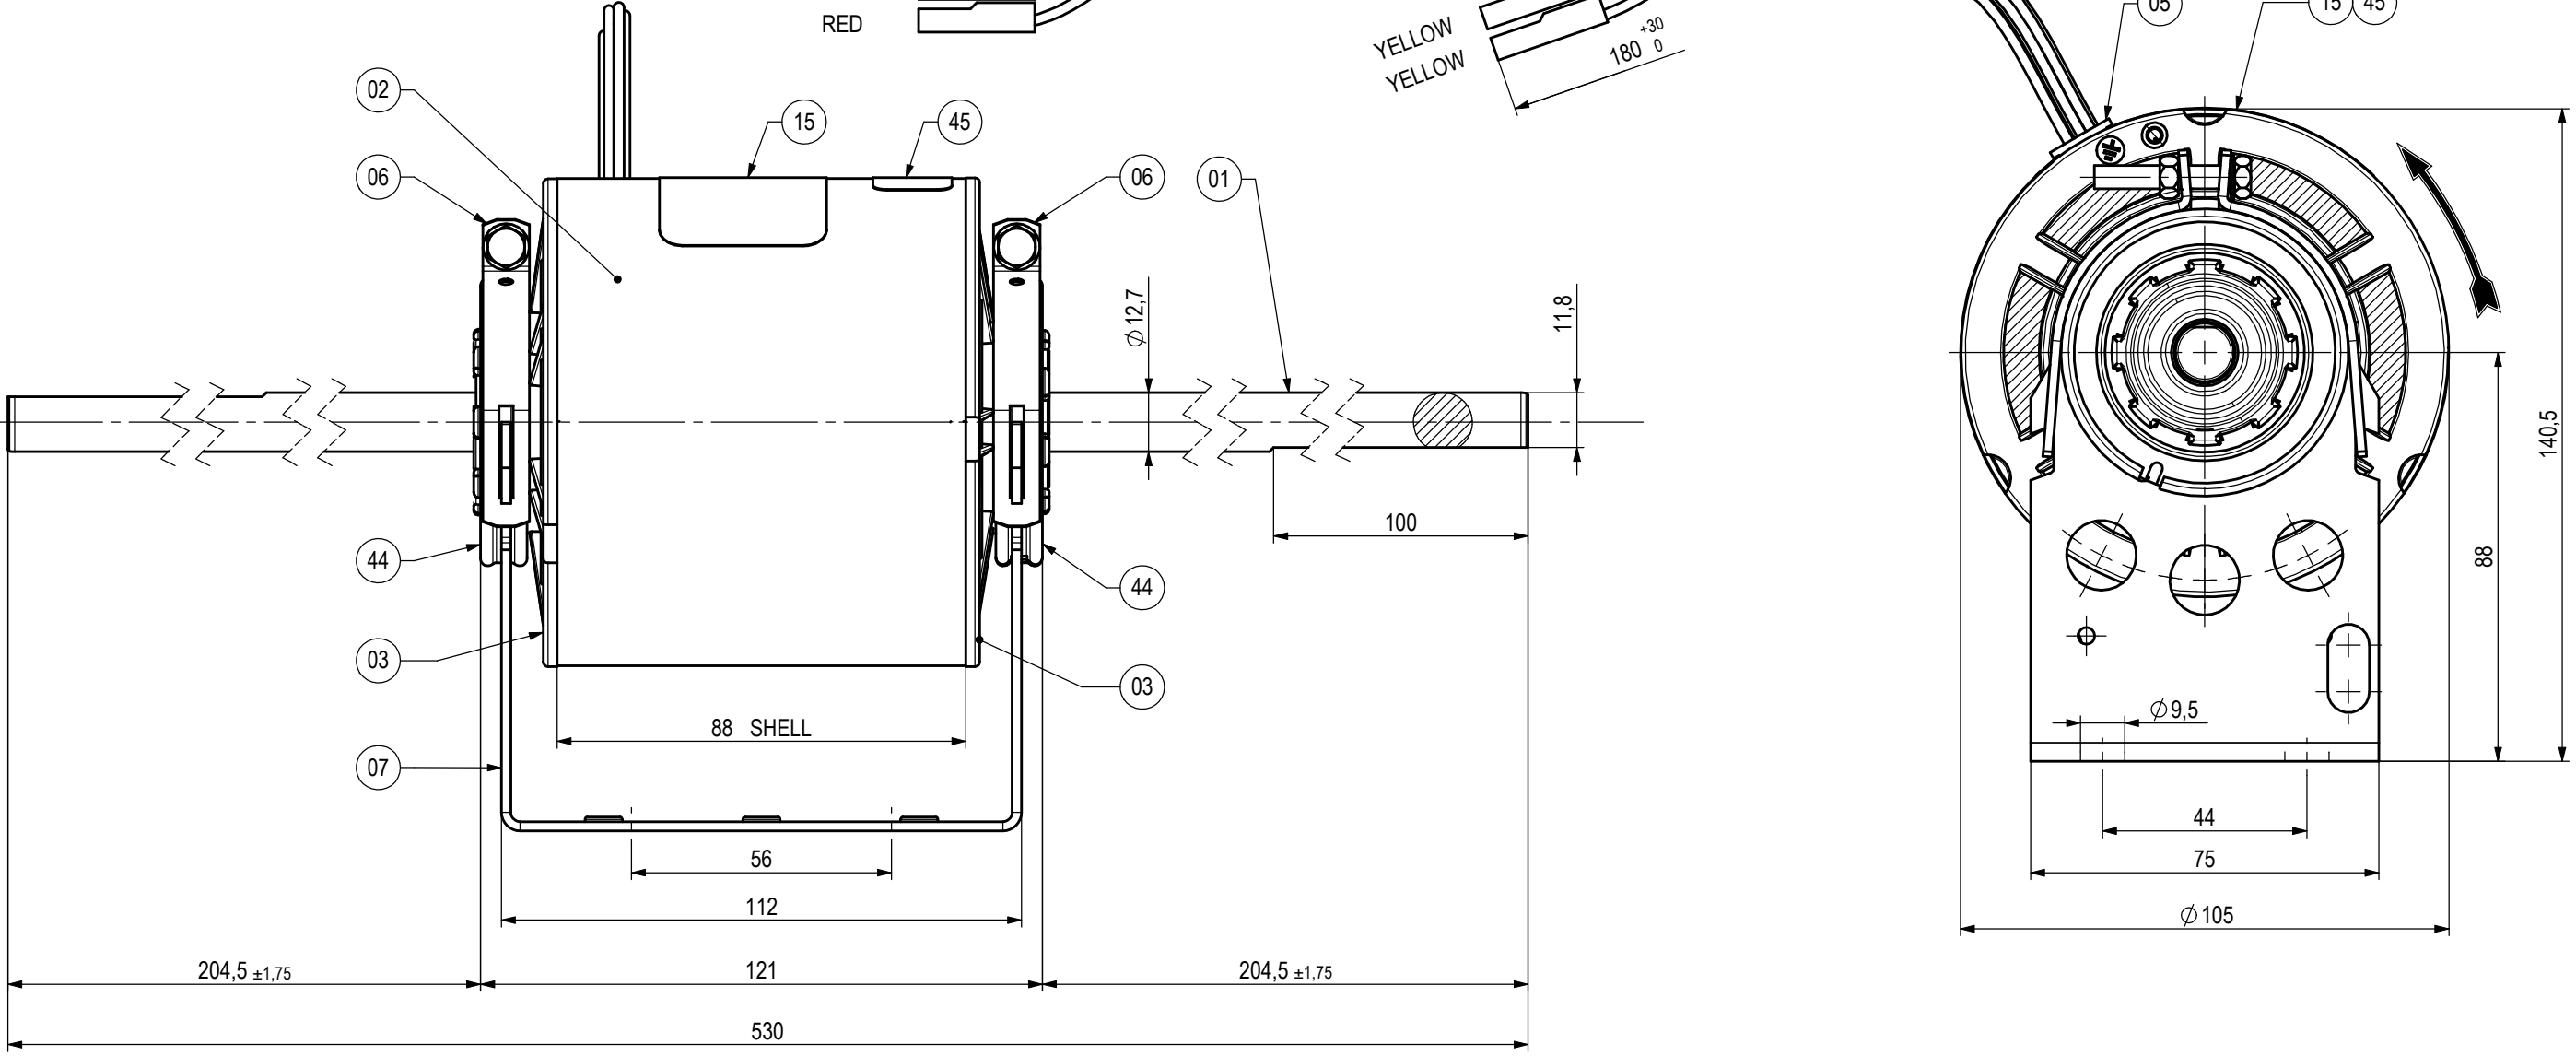

| Rel. | Date     | Description  | Executor signature | Checked             |
|------|----------|--|--------------------|---------------------|
| E    | 11-04-11 | DELETED NYLON BOOTLACE: ITEM 24. (Tolto laccio Nylon: pallinatura 24)                            | RdM 11/0007 A.T.   | D.Riboldi T.Sirtori |
| D    | 18-10-06 | Aggiunto cavo di terra con capocorda a occhiello, era con Stg. Ammortizzatore c/lamella di terra | RdM 0042/06 A.T.   | A.Zoncada T.Sirtori |
| C    | 23-01-04 | Rifatto lucido a CAD, aggiunto targhetta Olografica  |                    | R.Pedriani          |
| B    | 30-01-98 | In Targa: Tensione era 220V  |                    | D'Ettore            |
| A    | 24-07-92 | Tolto Targhetta freccia separata   |                    | R.Pedriani          |

MODIFICATIONS

For dimension without tolerance see standard UNI EN 22768-mK

Treatment . . . . .  
Material . . . . .

ELCO

Drawn Baldi  
Date 01/06/82  
Check ---  
Scale ---

SINGLE PHASE MOTOR  
3RGB 6-20-20-/ 1  
Motore Monofase

Weight gr. . . . .  
Ref. No . . . . .

4-010-256

A3

Release E