



MFA/COMO DRILLS

STOCK RANGE MINIATURE LOW VOLTAGE D.C. MOTORS.

RE - 140 (3 POLE) & RE - 140/1



WEIGHT 20g (APPROX)

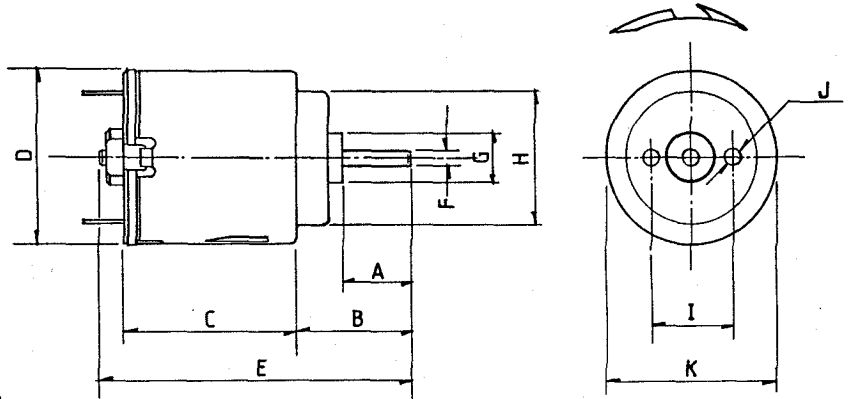

DIMENSIONS	A	B	C	D	E	F	G	H	I	J	K
MILLIMETER	8.3	14.0	21.0	21.0	38.0	2.0	6.15	16.0	10.0	2.0	20.15
DECIMAL INCHES	0.33	0.55	0.827	0.827	1.496	0.079	0.242	0.63	0.394	0.079	0.793

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL TORQUE	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			R.P.M.	A	R.P.M.	A	oz - in	g - cm	W	%	oz - in	g - cm
RE - 140	1.5 - 3.0	1.5v CONSTANT	8200	0.190	6250	0.62	0.089	6.4	0.400	44.2	0.375	27.0
RE - 140	1.5 - 3.0	3.0v CONSTANT	14000	0.230	11300	0.96	1.444	10.4	1.210	42.0	0.750	54.0
RE - 140/1	3.0 - 9.0	6v CONSTANT	9200	0.066	7071	0.219	0.11	8.1	0.589	44.79	0.48	35.1

MFA/COMO DRILLS THE MILL, MILL LANE, WORTH, DEAL, KENT, CT14 0PA.

TEL: 01304 612132. FAX: 01304 614696
E-MAIL: MFA_COMO_DRILLS@COMPUSERVE.COM

THE ABOVE FIGURES ARE A GUIDE ONLY AND DO NOT FORM ANY CONTRACTUAL OBLIGATION ON THE PART OF MFA/COMO DRILLS.